


▶ INCLUDES

- ▶ Sheave, Shaft, Heavy Duty Bearings-Mounting Blocks Available.
- ▶ Special Sheave Assemblies ,Available

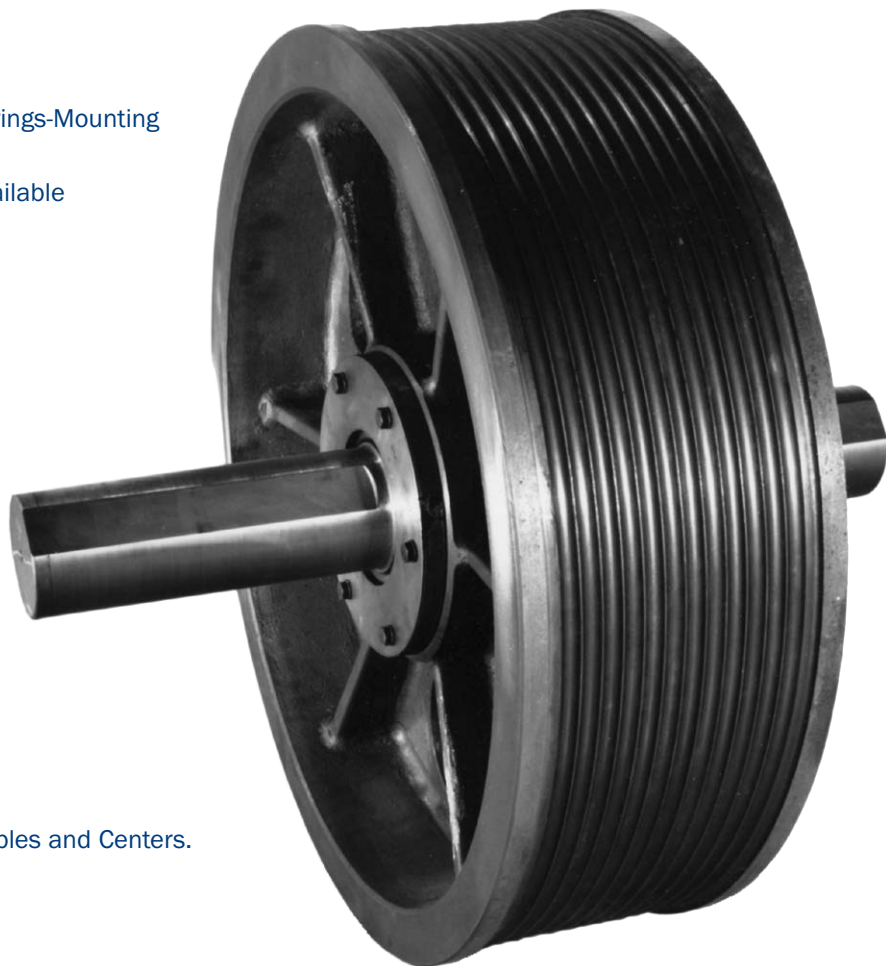

▶ NOTE

- ▶ Specify Number and Size of Cables and Centers.
- ▶ Standard Centers
 - 1/2" Rope = 7/8" Pitch
 - 5/8" Rope = 1 " Pitch
 - 3/4" Rope = 1-1/8 Pitch
- *Secondary Sheave

HEAVY DUTY SHEAVE ASSEMBLIES FOR DEFLECTORS, 2:1, OVERHEAD, COUNTERWEIGHT AND GEARLESS SECONDARY SHEAVES

PART NO.	OUTSIDE DIAMETER	FACE WIDTH	MAX NO. & SIX OF CABLES
THSD-40-HD	40	7.5	(8) ^{1/2} , (7) ^{5/8} , (6) ^{3/4}
THSD-38-HD	38	7.5	(8) ^{1/2} , (7) ^{5/8} , (6) ^{3/4}
THSD-36-HD	36	7.5	(8) ^{1/2} , (7) ^{5/8} , (6) ^{3/4}
*THSD-34-HD	34	7.0	(7) ^{1/2} , (6) ^{5/8}
THSD-33-HD	33	14.0	(22) ^{1/2} , (18) ^{5/8} , (16) ^{3/4}
THSD-33-HD	32	7.0	(7) ^{1/2} , (6) ^{5/8}
*THSD-30-W	30	10.0	(16) ^{1/2} , (12) ^{5/8} , (10) ^{3/4}
THSD-30-HD	30	7.0	(6) ^{5/8}
THSD-28-HD	28	7.25	(8) ^{1/2} , (7) ^{5/8}
THSD-25-W	25	10.0	(16) ^{1/2} , (12) ^{5/8}
THSD-25-HD	25	8.0	(8) ^{1/2} , (7) ^{5/8}
THSD-20-HD	20	8.0	(8) ^{1/2}

